

STEP 5:

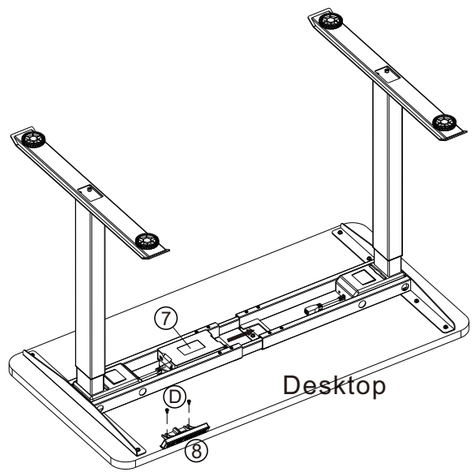

⑦	Control Box	* 1
⑧	Handset	* 1
Ⓓ	M4×12 Screws	* 2


STEP 6:

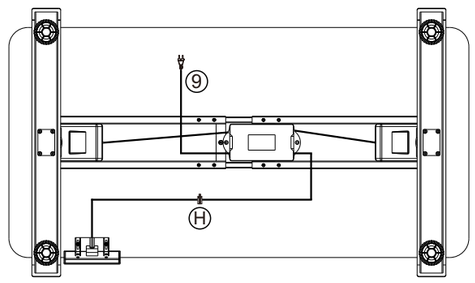

⑨	Wires	* 2
Ⓗ	Cable Clips	* 5

ofik®

Assembly Instruction

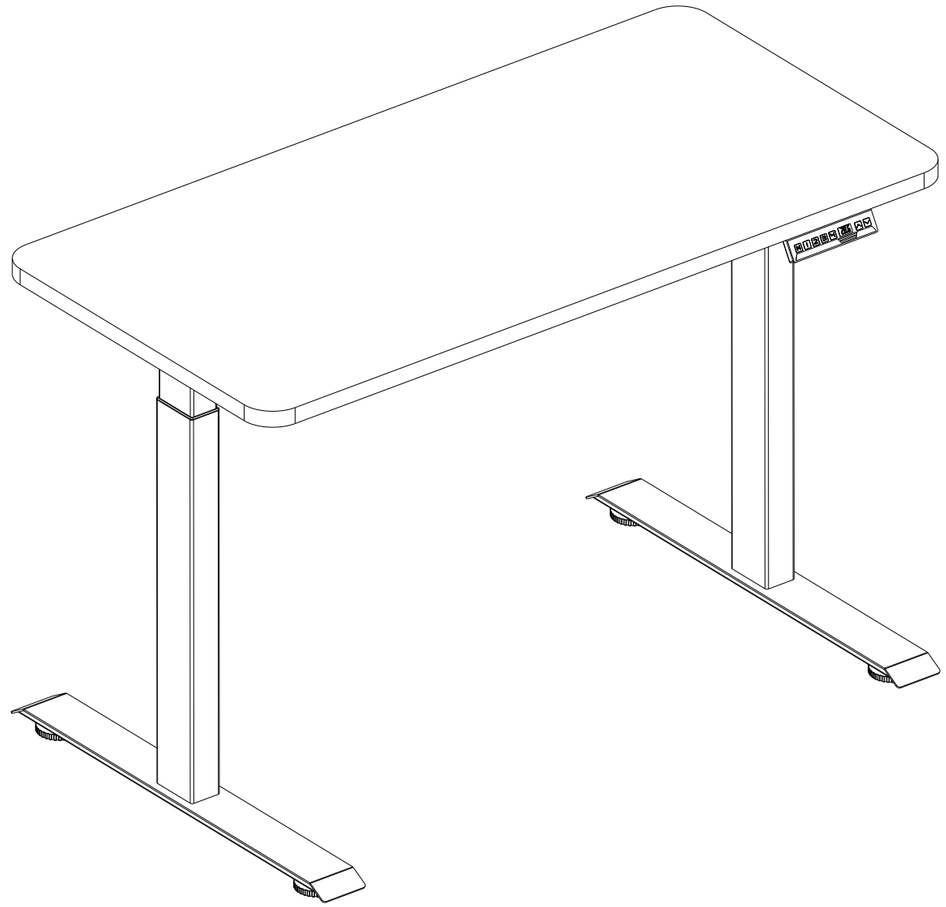


-Office Desk

-Electric lifting table

Ready To Use

Before Plugging the table into the outlet, make sure that
- The lift columns are level and set at the lowest position.
- All the screws are tightened,to avoid the desk making noise and wobbling.

Activate the desk by following the next steps.
-Please press button down and hold for 10-15 seconds until it stutters and beeps.
-Release the button, then your desk is ready to use.




Operation Guide

1. Memory desired height
-Press button “M”,display show “S-” with flash.
-Press number and set desired position.

2. Advanced Safety feature- lock and unlock the table.
-Press button up and down at same time for 5 seconds, display “LOC”
-All single button will be inactive and table will be unable to move.
-Pressing button up and down together willunlock the keypad and release the LOC

3. Reset the table

When display show Error code or RST, Please reset the table.
-Unplug the power cord from the control box.
-Unplug the cable that links the keypad to the control box.
-Wait 30 minutes and plug all the cables in again.
-Do the reset: please press button down and hold for 10-15 seconds until it stutters and beeps.



Press by holding
10-15 seconds

<u>If the keypad displays HOT,please unplug and replug and let it cool off for a couple of minutes before proceeding again.</u>





Installation tips





Please don't tighten the screws completely and go back later for a final tightening of all the screws after pieces are aligned with each other .



Lay a mat or old blanket out to assemble onto so the floor and the furniture doesn't get scratched or damaged during building.

Part List

①	②	③	④	⑤
				
Lift Column ∗2	Crossbar ∗2	Crossbar Center Rails ∗2	Side Bracket*2	Base ∗2


⑥	⑦	⑧	⑨
			
Leveling Studs ∗4	Control Box ∗1	Handset ∗1	Wires ∗2

Accessory Kit

Ⓐ	Ⓑ	Ⓒ	Ⓓ	Ⓔ
				
Qty∗8 M6×12 Screws	Qty∗8 M6×16 Screws	Qty∗4 M6×8 Screws	Qty∗2 M4×12 Screws	Qty∗10 M5×18 Screws


Ⓕ	Ⓖ	Ⓗ	Ⓘ
			
Qty∗8 M8×10 Screws	Qty∗10 Washers	Qty∗5 Cable Clips	4mm Allen Wrench

STEP 1:

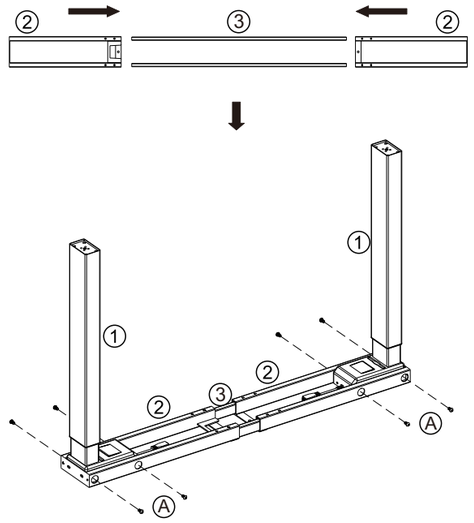


①	Lift Column	∗ 2
②	Crossbar	∗ 2
③	Crossbar Center Rails	∗ 2
Ⓐ	M6×12 Screws	∗ 8

STEP 2:

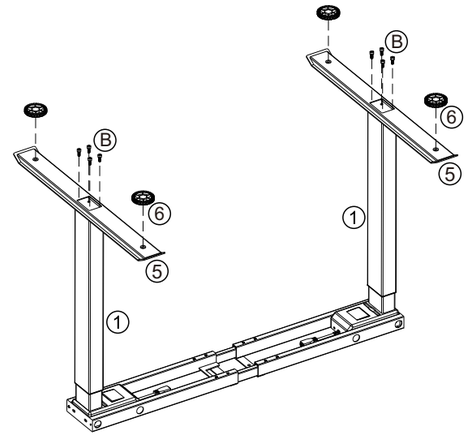


①	Lift Column	∗ 2
⑤	Base	∗ 2
⑥	Leveling Studs	∗ 4
Ⓑ	M6×16 Screws	∗ 8

STEP 3:

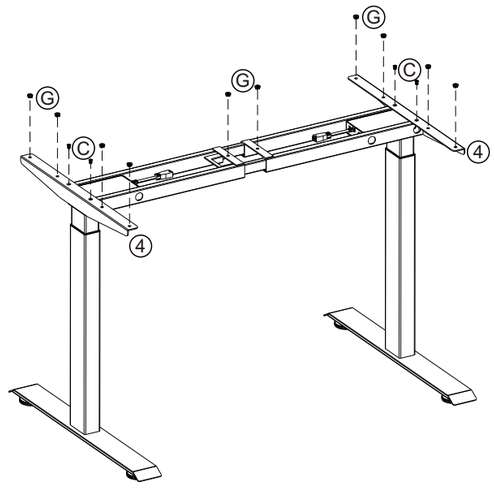

④	Side Bracket	∗ 2
Ⓒ	M6×8 Screws	∗ 4
Ⓖ	Washers	∗10

STEP 4:

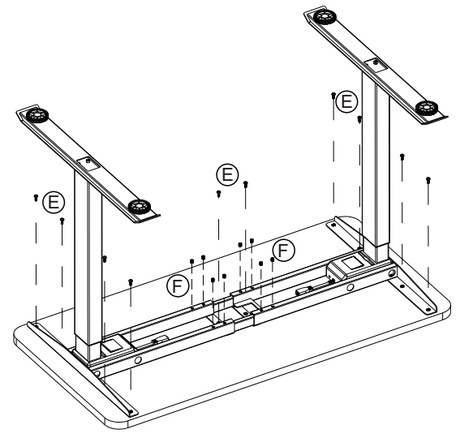

Ⓔ	M5×18 Screws	∗ 10
Ⓕ	M8×10 Screws	∗ 8